

EUROCOPTER CANADA LIMITED

SUBJECT: AIRFRAME FUEL FILTER (P/N 350-600004)


The Airframe Fuel Filter enables operation of the helicopter at low temperatures without the use of anti-ice additives in the fuel. The filter is designed to collect ice particles.

APPLICABILITY :

This Flight Manual Supplement must be used when the Airframe Fuel Filter is installed on the helicopter.

Department of Transport
(Canada) Approved

IMPORTANT NOTE

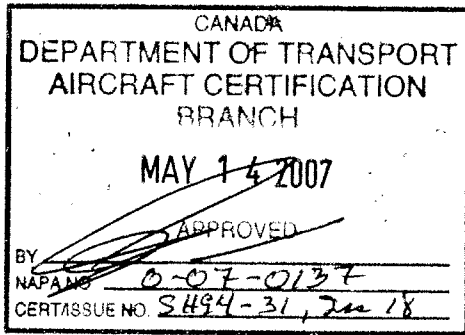

THE INFORMATION AND DATA CONTAINED IN THIS DOCUMENT SUPERSEDE OR SUPPLEMENT THAT CONTAINED IN THE BASIC APPROVED FLIGHT MANUAL FOR THE AS 350 B1, B2 HELICOPTER IN THOSE AREAS LISTED HEREIN. FOR LIMITATIONS, PROCEDURES AND PERFORMANCE NOT CONTAINED IN THIS DOCUMENT REFER TO THE APPROVED FLIGHT MANUAL AND OTHER APPLICABLE APPROVED FLIGHT MANUAL SUPPLEMENTS.

SECTIONS 2, 3, 4, AND 5 OF THIS DOCUMENT COMPRISE THE APPROVED FLIGHT MANUAL SUPPLEMENT. COMPLIANCE WITH SECTION 2, LIMITATIONS, IS MANDATORY.

SECTIONS 1 AND 6 ARE UNAPPROVED AND ARE PROVIDED FOR INFORMATION ONLY.

J. Palmer
Senior Engineer, Aircraft Certification
Aircraft Certification (PAI)
Ontario Region

THE INFORMATION CONTAINED IN THIS DOCUMENT SHALL BE TREATED AS THE PROPERTY OF EUROCOPTER CANADA LIMITED (ECL). THE RECIPIENT OF THIS DOCUMENT SHALL NOT DISCLOSE ANY INFORMATION CONTAINED HEREIN TO THIRD PARTIES WITHOUT THE WRITTEN PERMISSION OF ECL, AND SHALL NOT USE OR REPRODUCE THIS DOCUMENT IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN ITS ORIGINALLY INTENDED PURPOSE, OR TO EVALUATE ITS CONTENTS.

	NAME AND SIGNATURE	DATE	COMPANY DEPARTMENT
PREPARED BY:	D. Kerr	11 May 07	ECL ENGINEERING
PREPARED BY:			
CHECKED BY:	G. Krebs	May 11/07	CHIEF TEST PILOT
CHECKED BY:			
APP'D ACCEPTED (Civil A/W Authority)		14 May 07	TCCA
RELEASED BY:	R. Manson	15 May 07	ECL ENGINEERING


TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
1	GENERAL	4
2	LIMITATIONS	6
3	EMERGENCY PROCEDURES	6
4	NORMAL PROCEDURES	8
5	PERFORMANCE DATA	8
6	WEIGHT AND BALANCE	9

TABLE OF FIGURES

FIGURE	TITLE	PAGE
1	Airframe Fuel Filter Installation	4
2	Airframe Fuel Filter Installation (continued)	5
3	Press to Test / Annunciator Light on the Instrument Panel	7

Transport Canada - Approved

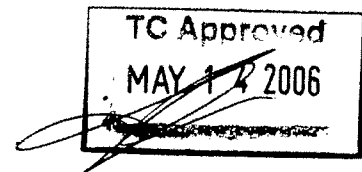

1. GENERAL (unapproved)

The installation of the Airframe Fuel Filter system enables operation of the helicopter at low temperatures without the use of anti-ice additives in the fuel. The filter is designed to collect ice particles.

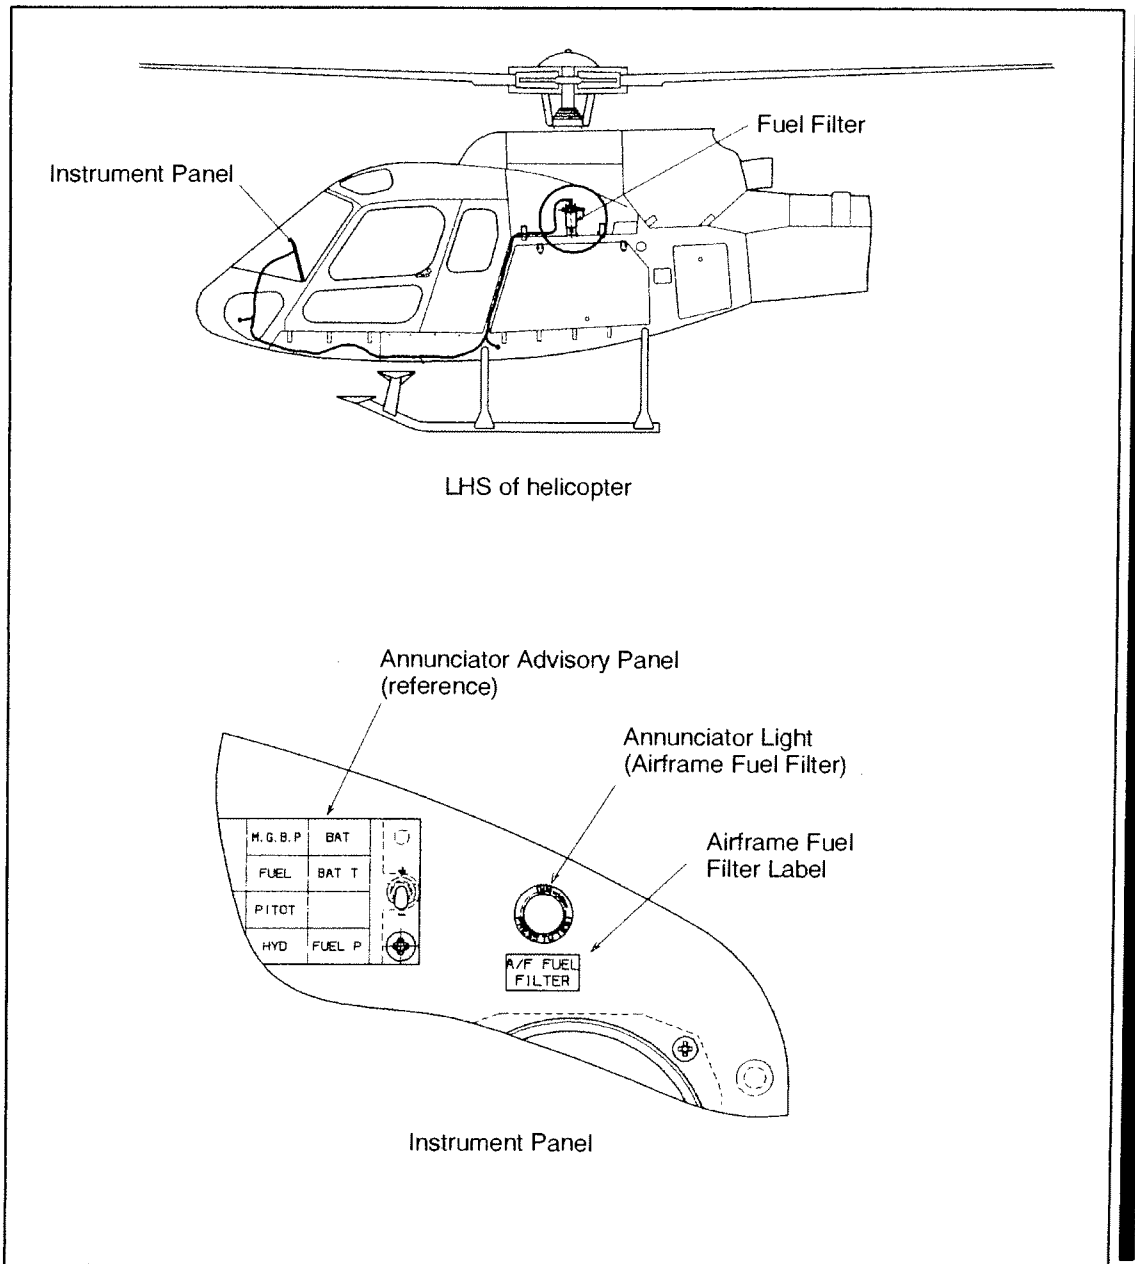


Figure 1 Airframe Fuel Filter Installation

Transport Canada - Unapproved

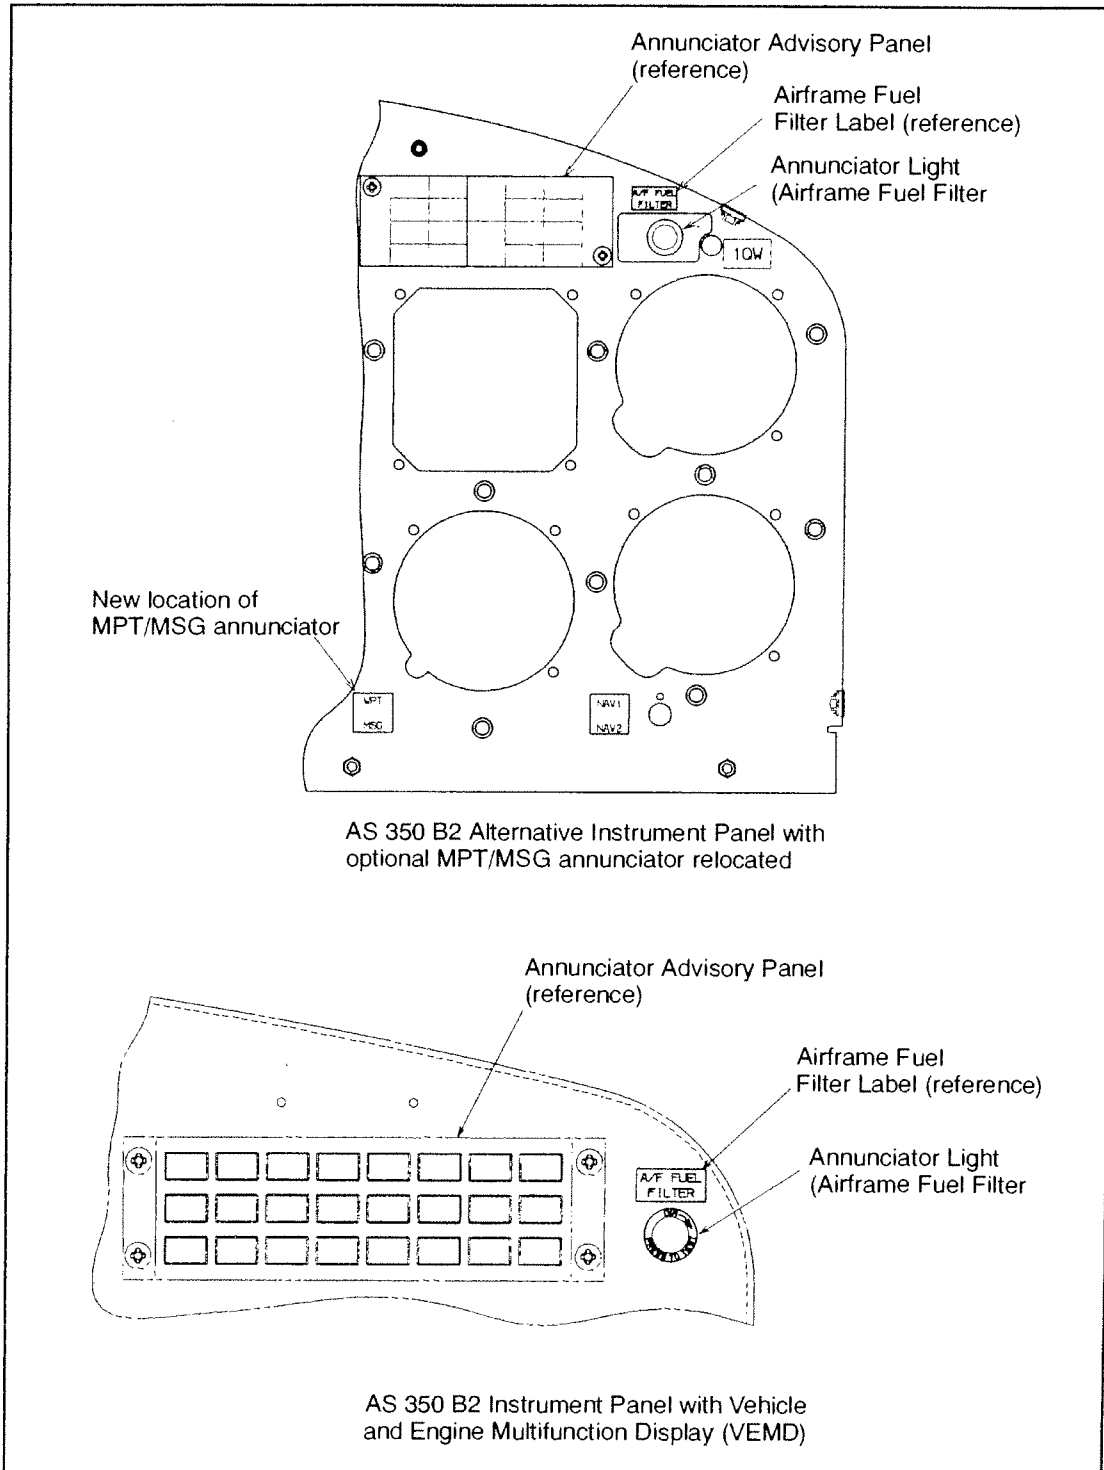


Figure 2 Airframe Fuel Filter Installation (continued)

Transport Canada - Unapproved

2. LIMITATIONS

Fuel Additives

Anti-ice additives are not required between the approved temperature limits, when operating with the standard fuel system.

When an operating Ferry Flight Fuel Tank is installed, anti-ice fuel additives must be used at temperatures below 0° C.

a. Placards

There is one placard associated with the Airframe Fuel Filter Installation. For placard locations, refer to Figure 1.

1) Placard:



Location: Located on the RHS of the Instrument Panel

3. EMERGENCY PROCEDURES

A/F FUEL FILTER light ON

If pressure remains in normal range


If pressure decreases

- Monitor fuel pressure indicator.

- Continue flight.

- Follow basic Flight Manual procedures.

Transport Canada - Approved



EUROCOPTER CANADA LIMITED

3. EMERGENCY PROCEDURES (continued)

NOTE If annunciator light illuminates during flight it may indicate an impending bypass of the filter.


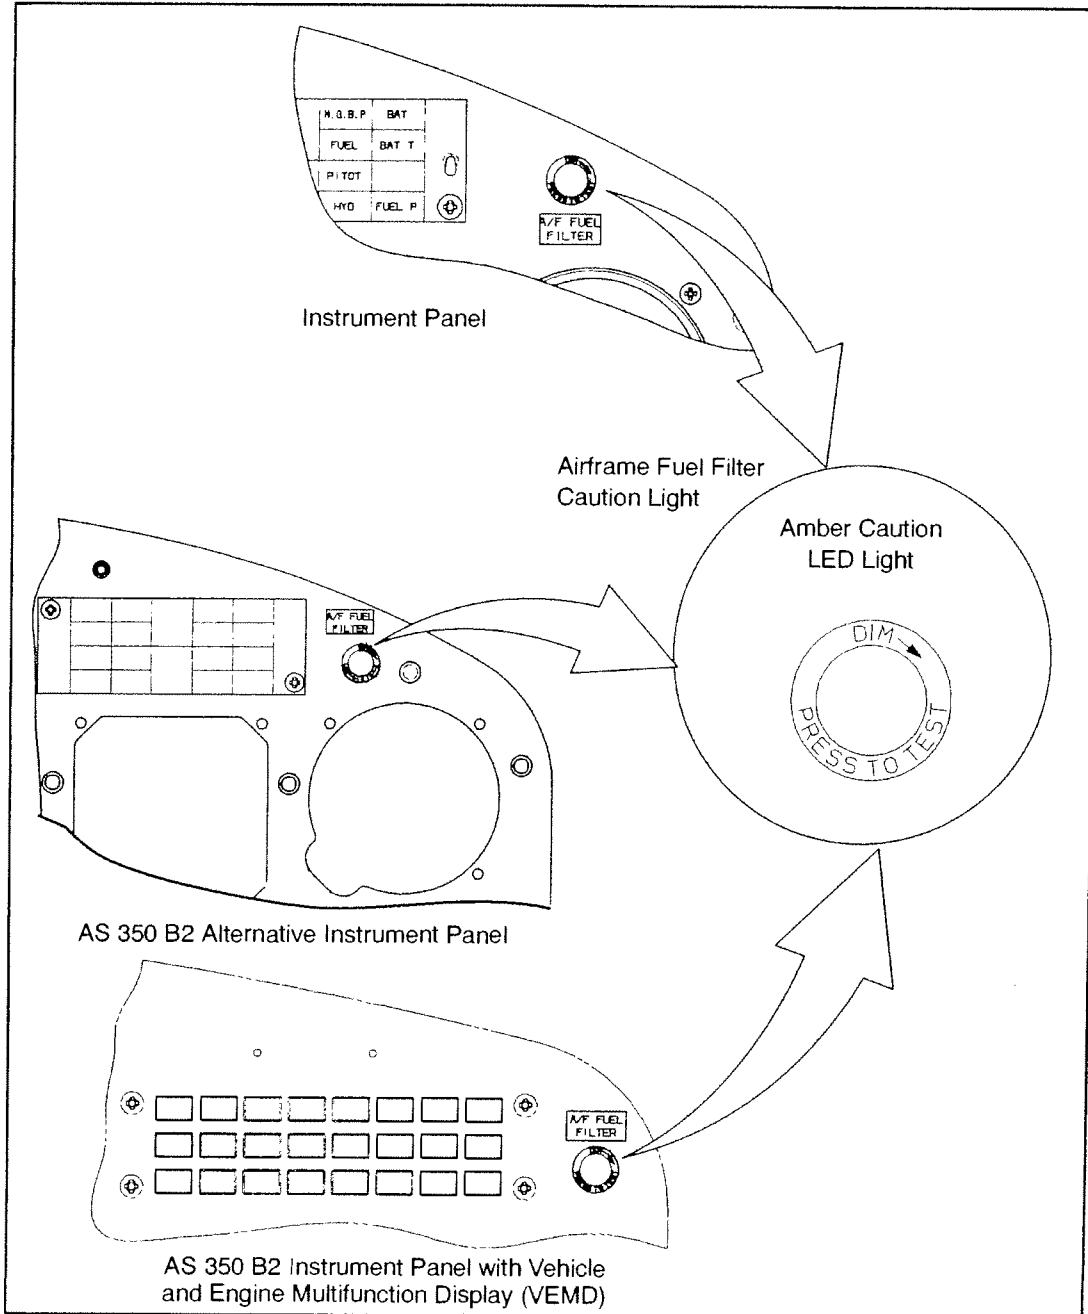


Figure 3 Press to Test / Annunciator Light on the Instrument Panel

Transport Canada - Approved



4. NORMAL PROCEDURE

a. Before the first flight of each day

- Battery - ON
- Fuel boost pump - ON
- Fuel filter and lines - Open drain valve, purge any air or water from the system. Close drain valve.
- Drain valve and fuel filter - Check for leaks
- Fuel boost pump - OFF
- Battery - OFF
- Fuel drain and transmission deck - No debris on fuel drain and/or transmission deck.


b. Pre-Flight Check

- Battery - ON
- Press A/F FUEL FILTER by-pass "press to test" caution light - Caution light illuminates

5. PERFORMANCE DATA

No Change.

Transport Canada - Approved



6. WEIGHT AND BALANCE (UNAPPROVED)

Total changes to weight and balance resulting from this modification are covered in the applicable installation instructions.

Items that are removed between routine operations: Not applicable

Transport Canada - Unapproved